

# TECHNICAL DATA SHEET

Dy-Mark (Aust) Pty Ltd

PO Box 1556 Toowong 4066

Phone: 1300 396 275 Fax: 1300 360 440

[www.dymark.com.au](http://www.dymark.com.au)



## Dy-Mark® WATER BASED Durable Acrylic Paint



**Dy-Mark® WATER BASED** is a high quality, quick drying acrylic based paint. It is suitable for DIY interior and exterior decorative projects around the home. Its specially developed water based formula has a low VOC content, low odour and lower toxicity. **Dy-Mark® WATER BASED** has a high gloss finish, excellent adhesion and high durability. Ideal for painting furniture, household accessories, arts & crafts.

### DIRECTIONS FOR USE

#### Suitable Surfaces:

Metal, wood and plastics when used with appropriate primer. Even suitable for use on polystyrene.

#### Ideal Application Temperature:

Between 10°C and 40°C. Avoid use in windy conditions.


#### Preparation:

Surface should be clean, dry and free from contaminants such as oil, grease, dirt and salt. Thoroughly sand new metal and lightly sand previously painted surfaces to ensure maximum adhesion. For superior protection and adhesion on timber and bare ferrous metals such as steel and iron use appropriate primer. For non-ferrous metals such as aluminium, copper, brass and stainless steel use Etch Primer. For plastics use a Plastic Primer.

#### Application:

Before spraying, cover surrounding areas to protect from overspray. **Shake** can for at least 45 seconds **AFTER** the mixing ball begins to rattle. Shake the can occasionally during use. Hold the can upright approximately 20-25cm from the surface. Spray with a smooth sweeping motion. To prevent paint from sagging, apply several light mist coats rather than one heavy coat.

Adjust red insert on nozzle to achieve desired spray pattern. Use horizontal setting to spray up and down and vertical setting to spray left to right (refer to diagram below).

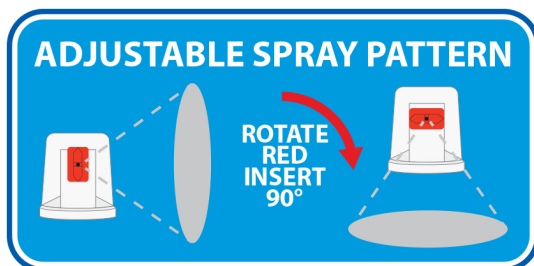

#### Coverage:

Approximately 1.7m<sup>2</sup> per can (depending on the surface and amount of overspray).

# TECHNICAL DATA SHEET

Dy-Mark (Aust) Pty Ltd

PO Box 1556 Toowong 4066

Phone: 1300 396 275 Fax: 1300 360 440

[www.dymark.com.au](http://www.dymark.com.au)



## Drying Time:

Touch dry in 30 minutes (25°C). Recoat within 1 hour or after 24 hours. Drying will be slower in cold and humid conditions, in the absence of ventilation or where heavy film build is applied.

## After Spraying:

**Prevent blocking** by holding the can upside down and spraying until only clear gas escapes. Also **wipe spray tip** of nozzle clean.

\* **Clean up wet** paint with **water** during the first minutes of drying. Clean up dry paint with **Dy-Mark® General Purpose Thinner**.

## TECHNICAL DATA

**Size:** 300g Aerosol

**Finish:** 2 x Flat, 12 x Gloss

**Colour:** Flat Black, Flat White, Gloss Black, Gloss White, Daffodil, Deep Denim, Grassy Green, Lagoon, Orange Flame, Pretty Pink, Wildfire, Rose Pink, Electric Purple, Almond Brown.

**Consistency:** Liquid

**VOC Level:** <470g/L

**Clean Up:** \* **Clean up wet** paint with **water** during the first minutes of drying. Clean up dry paint with **Dy-Mark® General Purpose Thinner**.

## STORAGE


Protect from sunlight. Do not expose to temperatures exceeding 50°C/122°F.

## DISPOSAL

Dispose of contents/container according to regional regulations.

## FIRST AID / SAFETY INFORMATION

Please refer to Safety Data Sheet before use. Safety data sheets are available from our website [www.dymark.com.au](http://www.dymark.com.au) or from the following QR code:



**Call a POISON CENTRE: Australia 13 11 26, New Zealand 0800 764 766** or doctor/physician if you feel unwell.

Intentional misuse by deliberately inhaling contents can be harmful or fatal.

**KEEP OUT OF REACH OF CHILDREN.**

# TECHNICAL DATA SHEET

**Dy-Mark (Aust) Pty Ltd**

PO Box 1556 Toowong 4066

Phone: 1300 396 275 Fax: 1300 360 440

[www.dymark.com.au](http://www.dymark.com.au)



## DISCLAIMER

The information provided within this Technical Data Sheet is intended as a guide only. The performance of this product will depend on many factors outside the control of Dy-Mark®; including surface preparation, surface-specific conditions, surface types, correct application and environmental conditions.

Dy-Mark® recommends customers undertake their own risk assessment prior to use, to determine the suitability of the product for the particular use intended.

It is essential that a sample of the product be applied to the intended area of use to ensure it is acceptable in appearance and finish and that it performs on the specific surface.

For further information please contact the Dy-Mark® Sales and Customer Support Centre on 1300 396 275.