

TECHNICAL INFORMATION for TDS and INSTRUCTION details for AEROSOL CAN

AEROSOL Maintenance		Dry PTFE Lubricant	
Product:			
Prepared by:	JZ, AT		
Issue No:	1.1	Issue Date:	29-08-2014

Details for FRONT of CAN:

1.0 Company Logo:



2.0 Brand Logo:

PROTECH

3.0 Slogan (Under Brand logo):

CLEANERS & LUBRICANTS

4.0 Product Name:

ANTI FRICTION DRY PTFE LUBRICANT

FORM: NPDT0003 V1.1 Page 1 of 7



5.0 Features & Benefits:

- 1. Dry film that resists dirt, dust and oil
- 2. For use on metal, plastic and glass
- 3. Lubrication and protection

6.0	Desc	ription	banner:
-----	------	---------	---------

NA

7.0 Net weight:

150g Net

8.0 Category:

INDUSTRIAL MAINTENANCE

9.0 Front Logos: (Choose from section 18)



2

FORM: NPDT0003 V1.1 Page 2 of 7



Details for BACK of CAN:

10.0 INTRODUCTION:

Dy-Mark Protech range of Industrial grade cleaners and lubricants have been specially formulated for the professional who requires high performance results in Industrial applications.

Dy-Mark PROTECH Dry PTFE Lubricant is a multi-purpose dry film lubricant. It will penetrate and bond to metal, wood, rubber and most surfaces and will form a non-staining micro thin film that prevents sticking, reducing friction and wear. It will seal out moisture, inhibit corrosion and resists oil, dust and dirt build up. Will not melt, freeze or wash off.

11.0 RECOMMENDED USES:

Hinges, chains, window tracks, locks, conveyers, cutting blades, saw blades, sliding drawers, sliding doors, and other uses.

(Plus show smaller version of pictures from front of can)

12.0 DIRECTIONS:

Shake can for at least 45 seconds **AFTER** the mixing ball begins to rattle. Shake can occasionally during use. Clean and dry surface area thoroughly. Spray can in **UPRIGHT** position only. Spray light even film directly onto surfaces. Leave film to dry minimum 10-15 minutes. Full cure in 24 hours. Repeat application when needed for long term dry film lubrication and protection, allowing it to dry between applications.

13.0 TRY THESE OTHER PRODUCTS IN THE DY-MARK PROTECH RANGE:


Penetrating Oil, Multi-Purpose Lubricant, White Lithium Grease, Wet PTFE, Chain Lubricant, Dry Graphite lubricant, Brake & Parts Cleaner, Degreaser, Contact Cleaner, Freeze Spray, Air Duster.

FORM: NPDT0003 V1.1 Page 3 of 7




14.0 STORAGE / DISPOSAL / SAFETY INFORMATION / FIRST AID

As per standard format which is: (If changes are required, please specify).

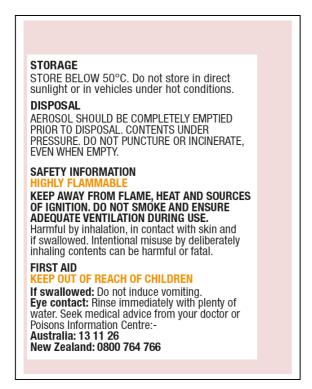

15.0 Back Logos: (Choose from section 18)

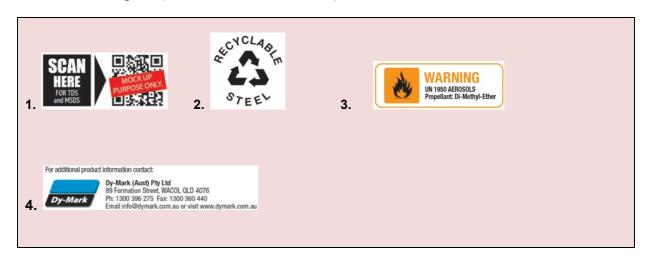

FORM: NPDT0003 V1.1 Page 4 of 7



16.0 OTHER TECHNICAL INFORMATION for TDS only:

Size: 150g Aerosol

Colour: Clear

Consistency: Dry film

Propellant: Di-Methly-Ether

Warning: UN1950 AEROSOL

17.0 BARCODE AND ITEM CODE INFORMATION:

Barcode required to be printed on can: YES

BARCODE NUMBER: 9321126006129

DY-MARK ITEM CODE NUMBER: 42031501

FORM: NPDT0003 V1.1 Page 5 of 7



18.0 List of Logos to choose from:



Front Only 15.1



Front Only 15.2



Front Only 15.3



Front Only 15.4



Front Only 15.5



Front Only 15.6



Front Only 15.7



Front Only 15.8



Back Only 15.9



Back Only 15.10



Back Only 15.11



Back Only 15.12



Back Only 15.13



Back Only 15.14



Back Only 15.15



15.16



19.0 APPROVALS:

Department	Responsible	Signature	Date
Chemist	Aditya Tembe	AT	
OHS	lan Wiggins	IW	
Manufacturing Manager	Steve Madden	SM	
Purchasing	Michael Niebling	MN	
Product Development Manager	John Zeritis	JZ	
Sales Manager Industrial	Andrew Cope	AC	
Sales Manager Hardware & Trade	Brad McLady		
Marketing Manager			
Executive	Gary Nuss	GN	

FORM: NPDT0003 V1.1 Page 7 of 7